

1/12

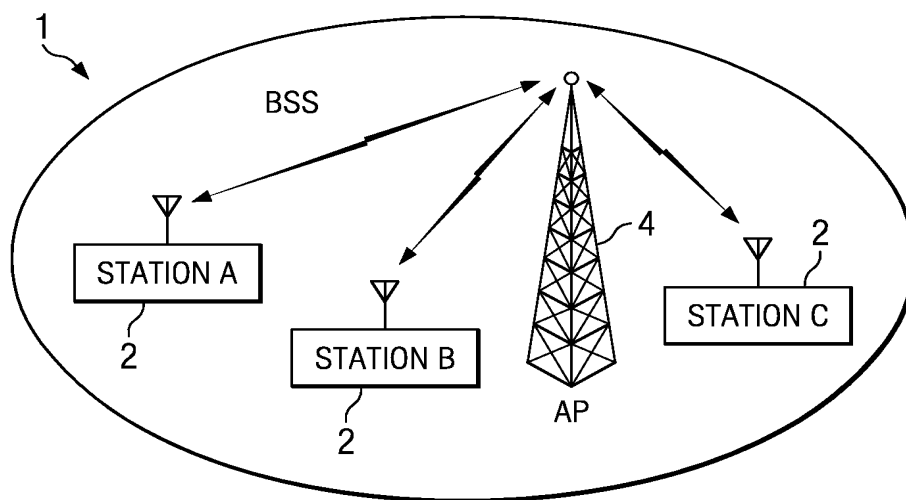


FIG. 1
(PRIOR ART)

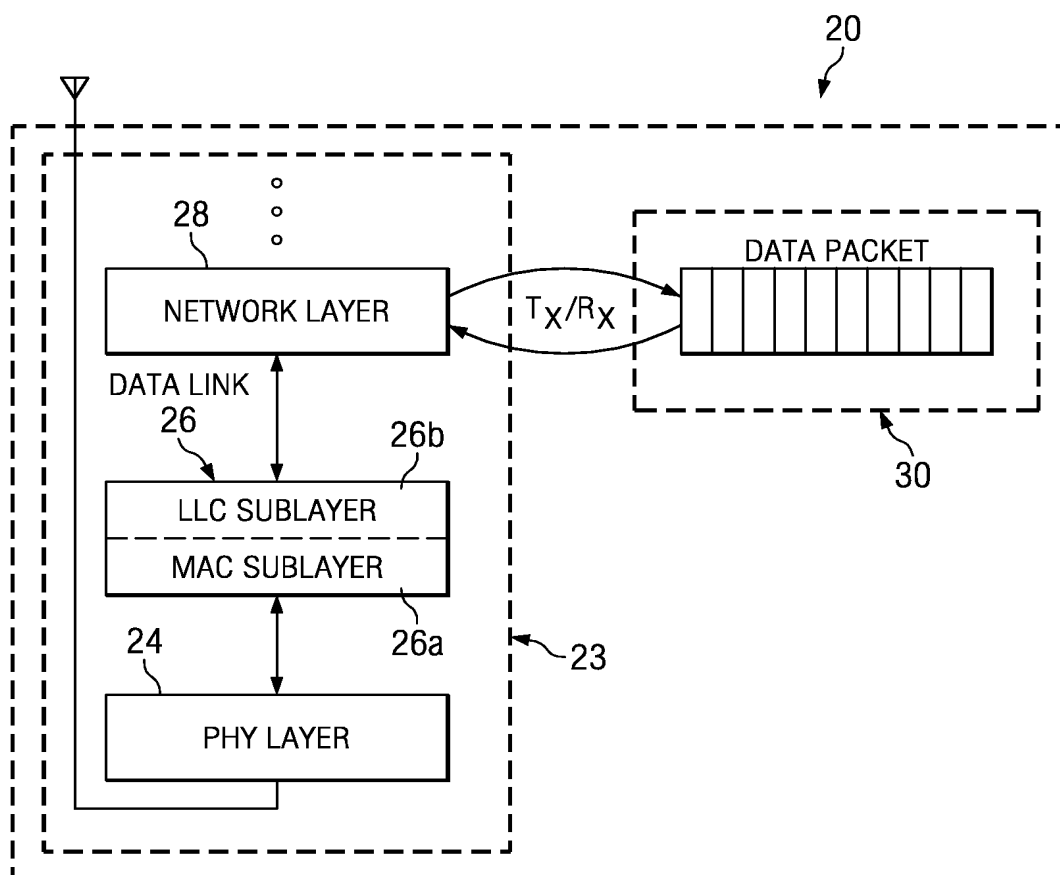


FIG. 2
(PRIOR ART)

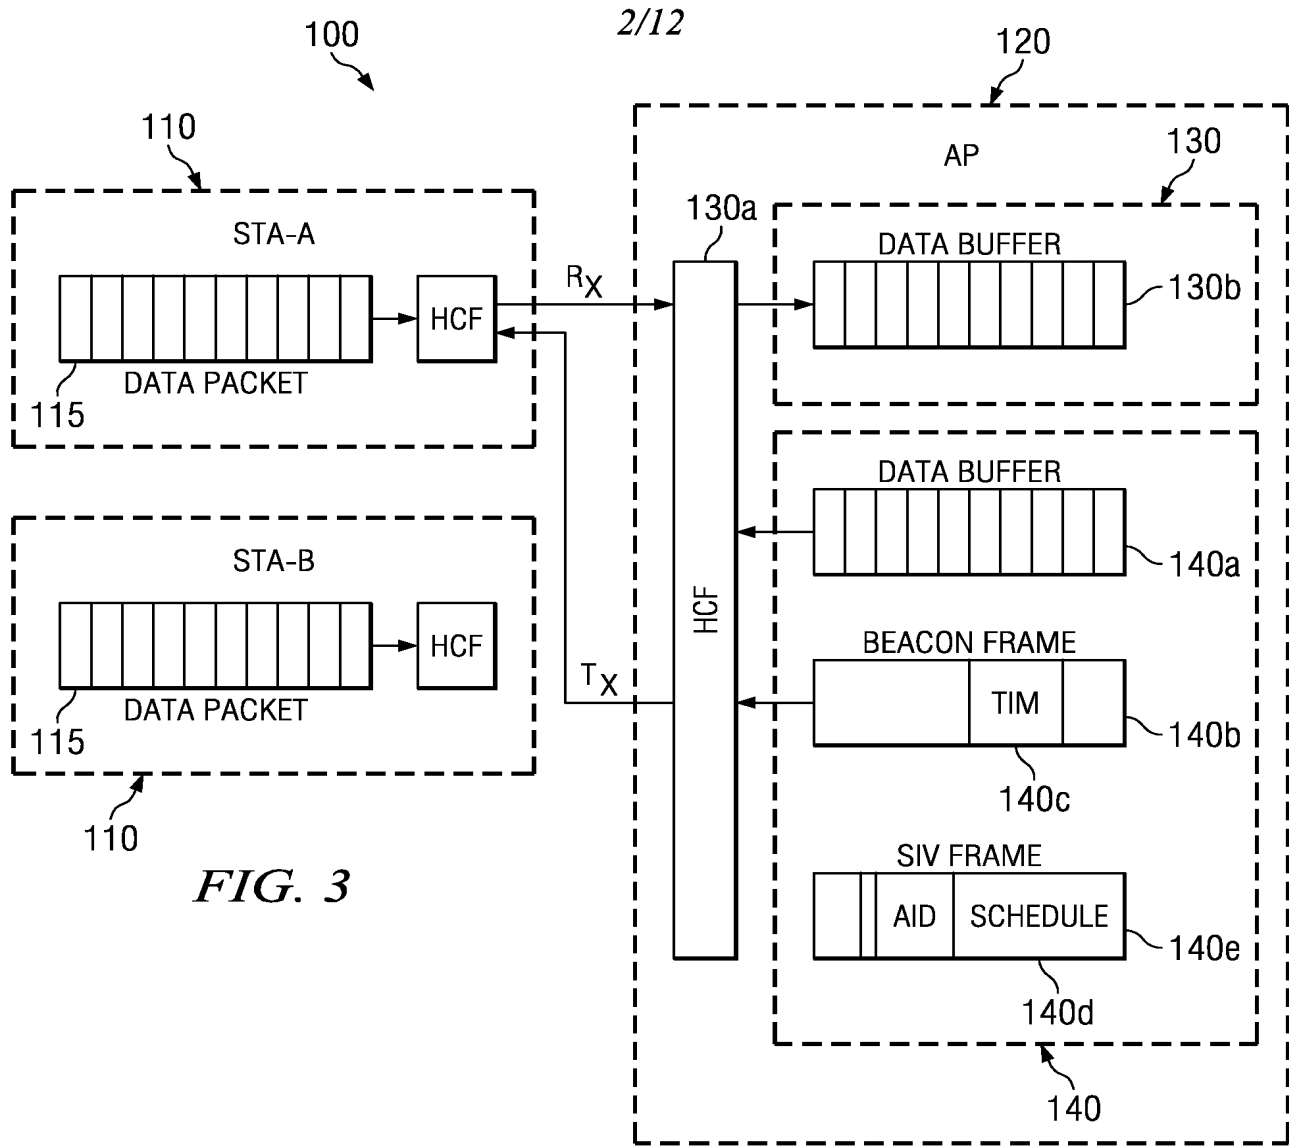


FIG. 4

INTER-FRAME SPACES FOR 802.11_B DSSS (μs)

SLOT TIME	SIFS TIME	PIFS TIME	DIFS TIME
20	10	30	50



200

230

FRAME BODY OF ACTION FRAME

235 FIELD NAME	240 CATEGORY CODE	245 ACTION CODE	250 ACTIVATION DELAY	255 DIALOG TOKEN	260 ACTION BODY
BYTES	1	1	1	1	0-2300

FIG. 5A

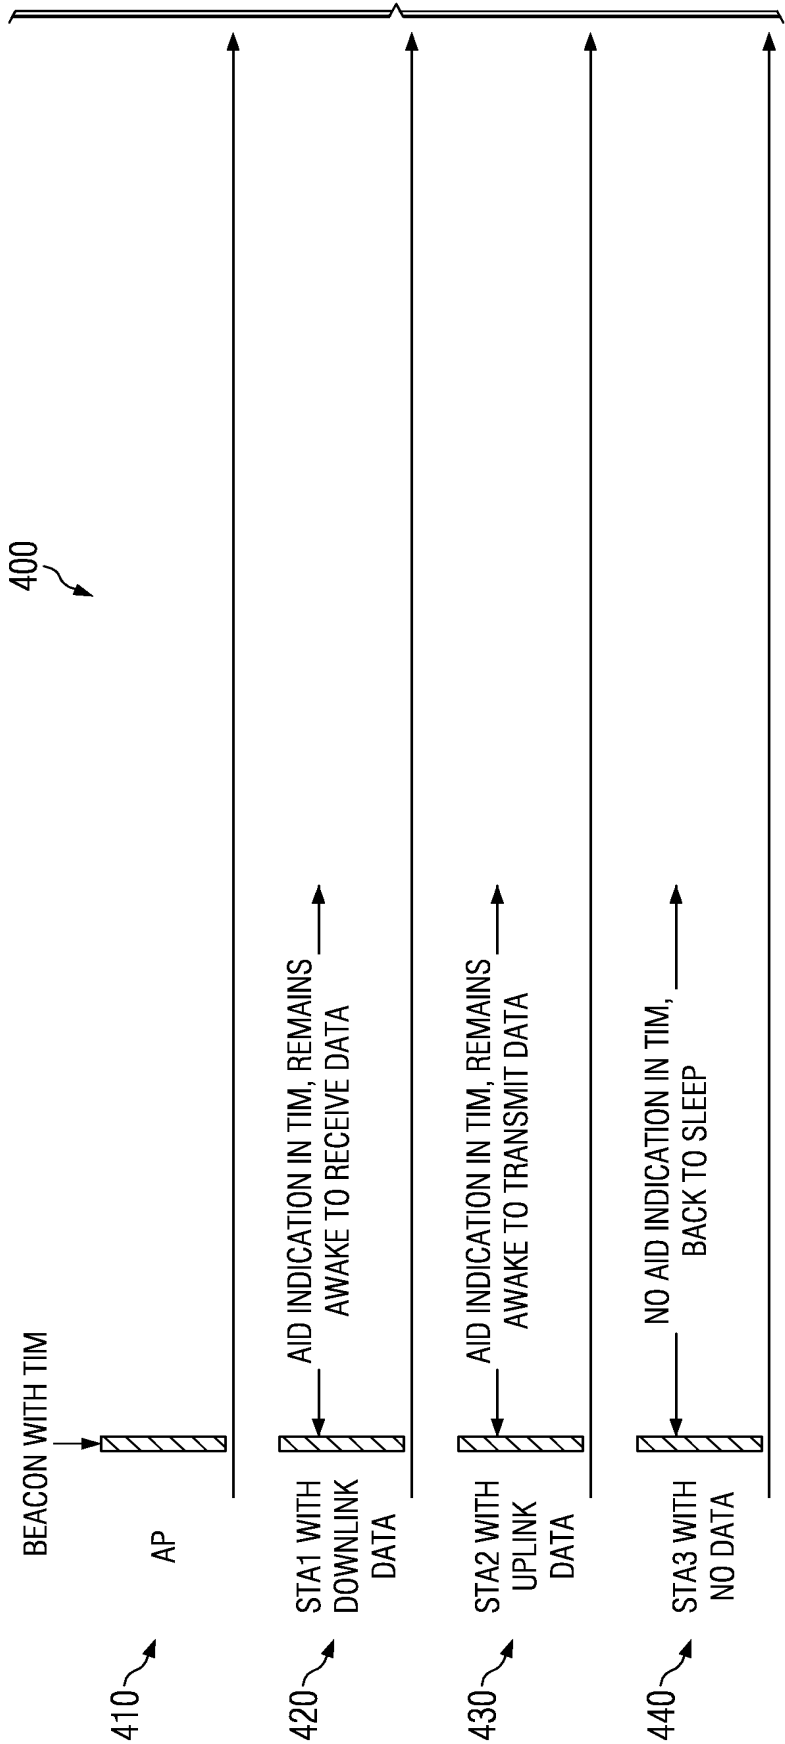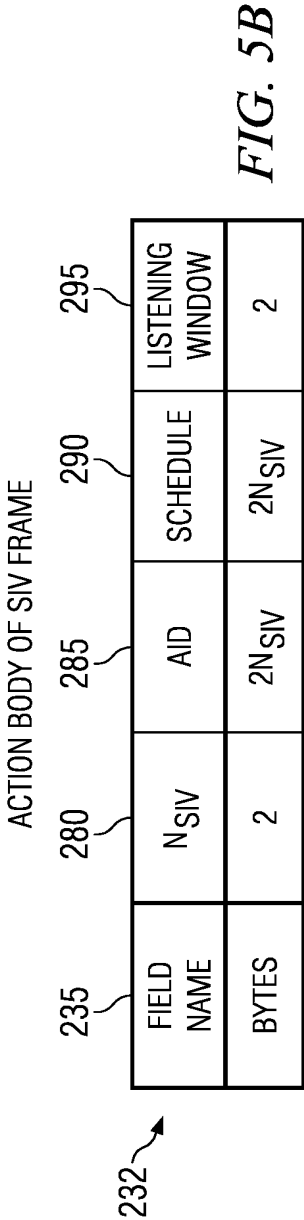

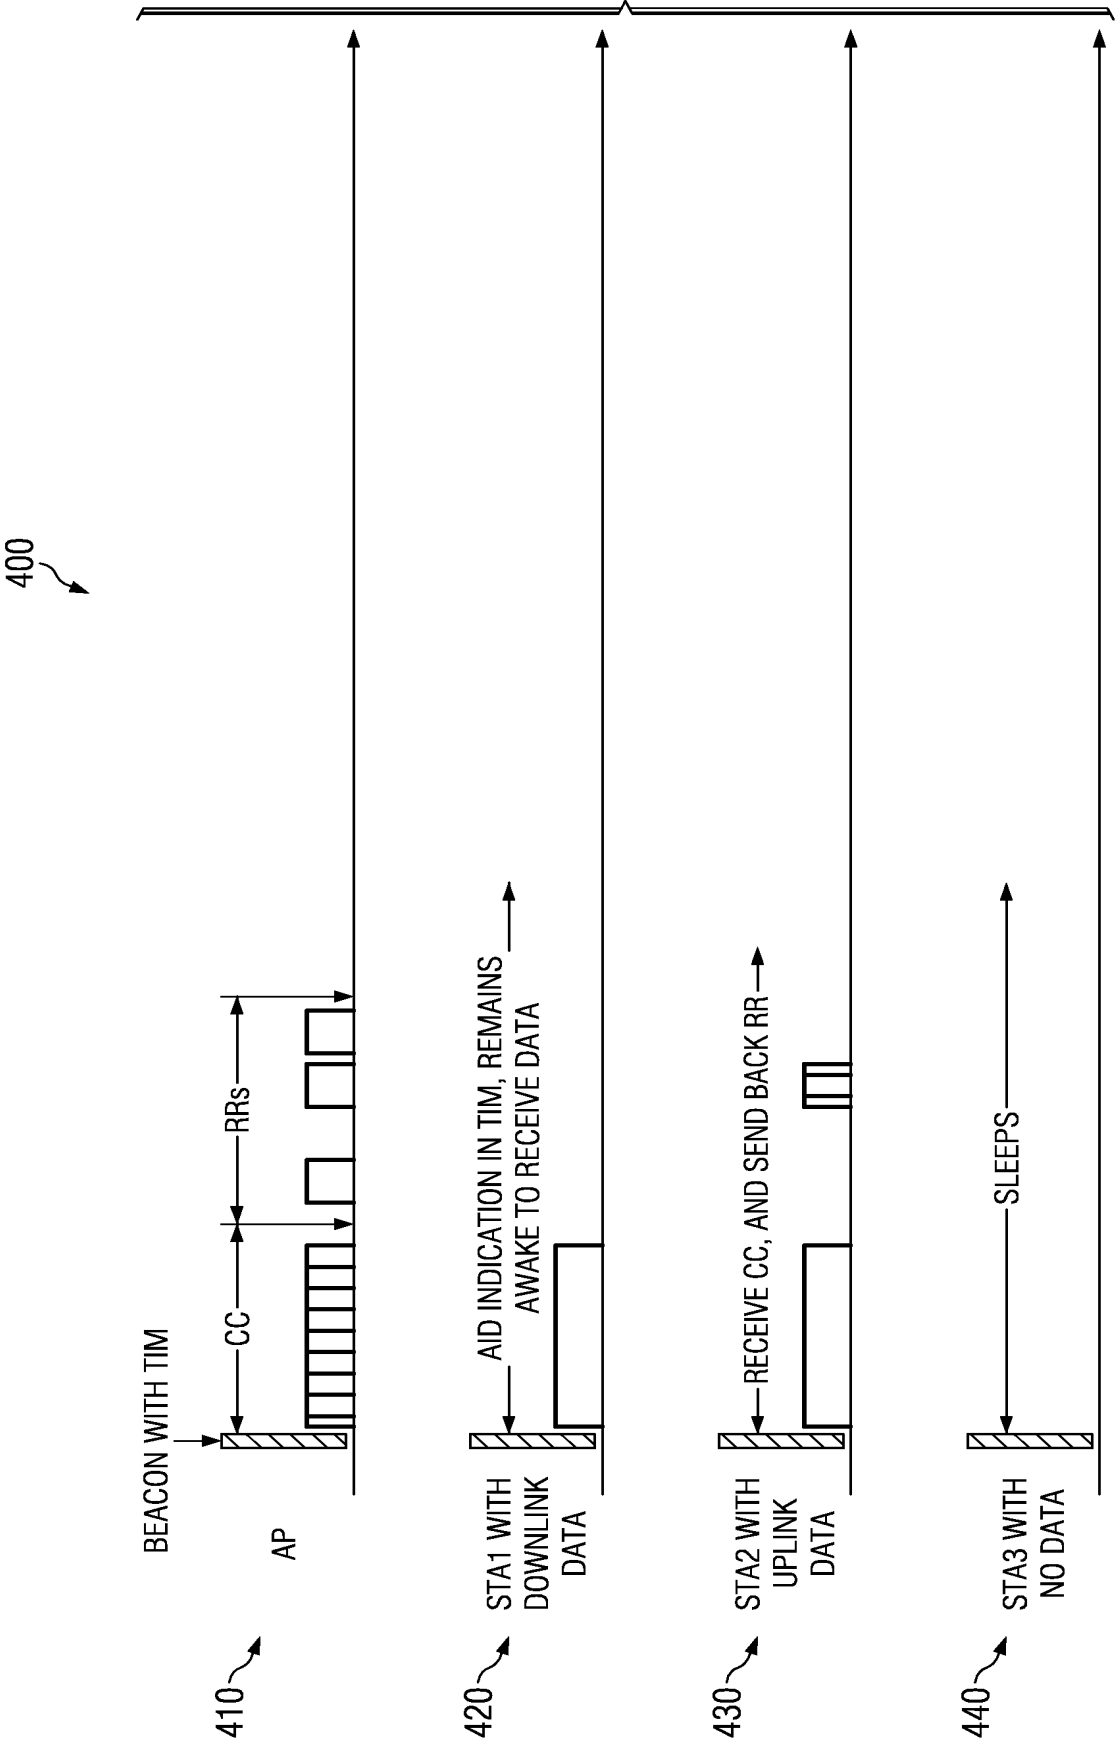


FIG. 6B

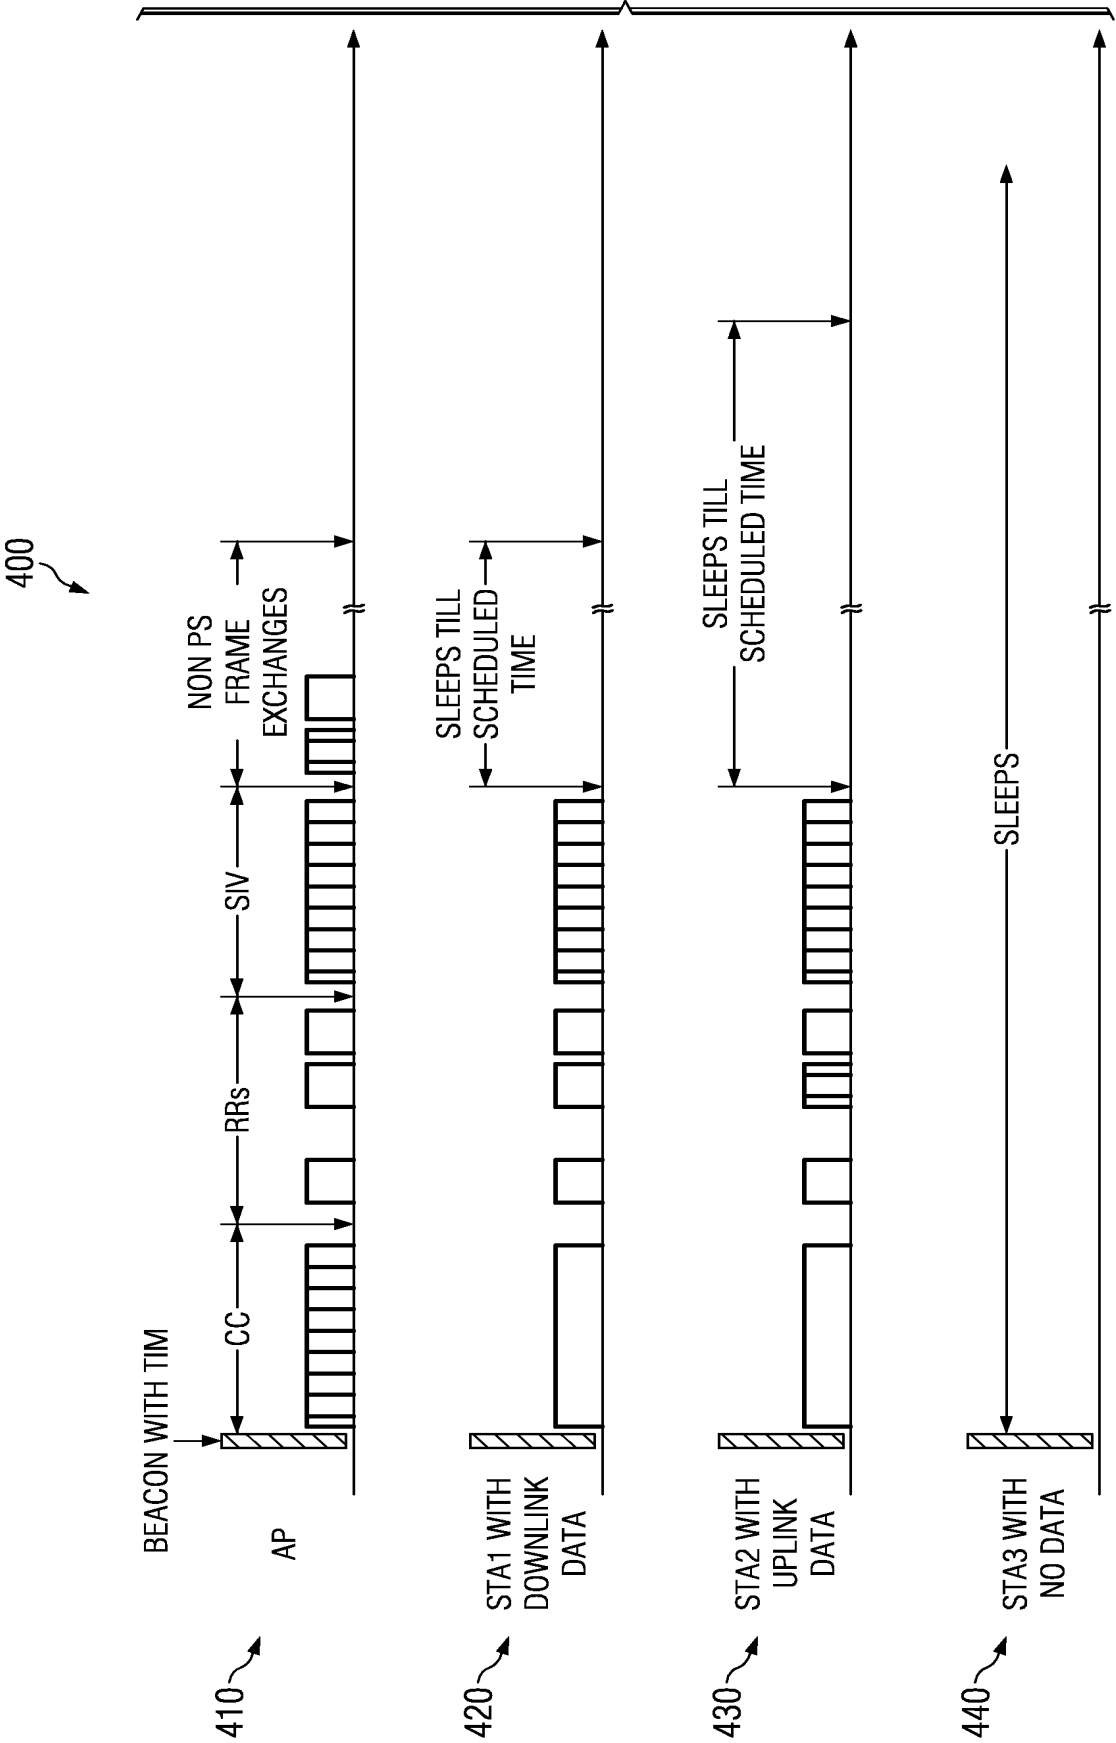


FIG. 6C


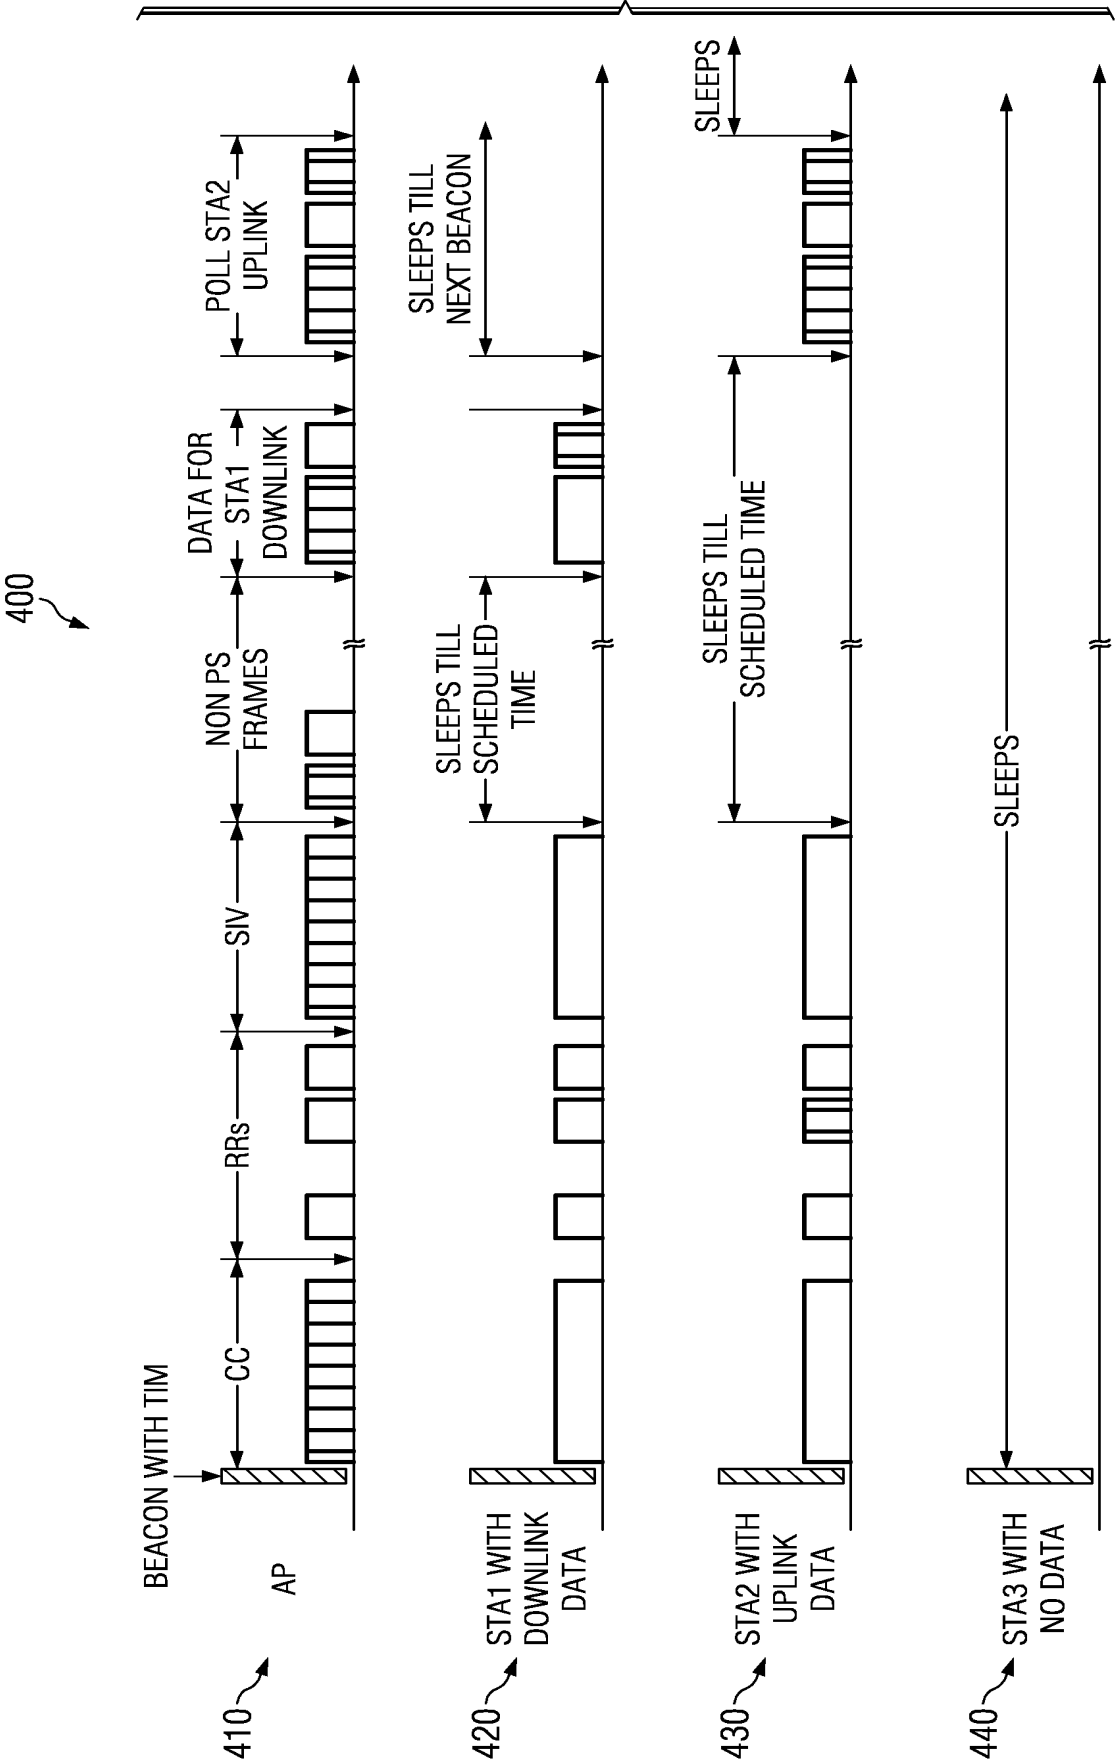


FIG. 6D

7/12

FIG. 7

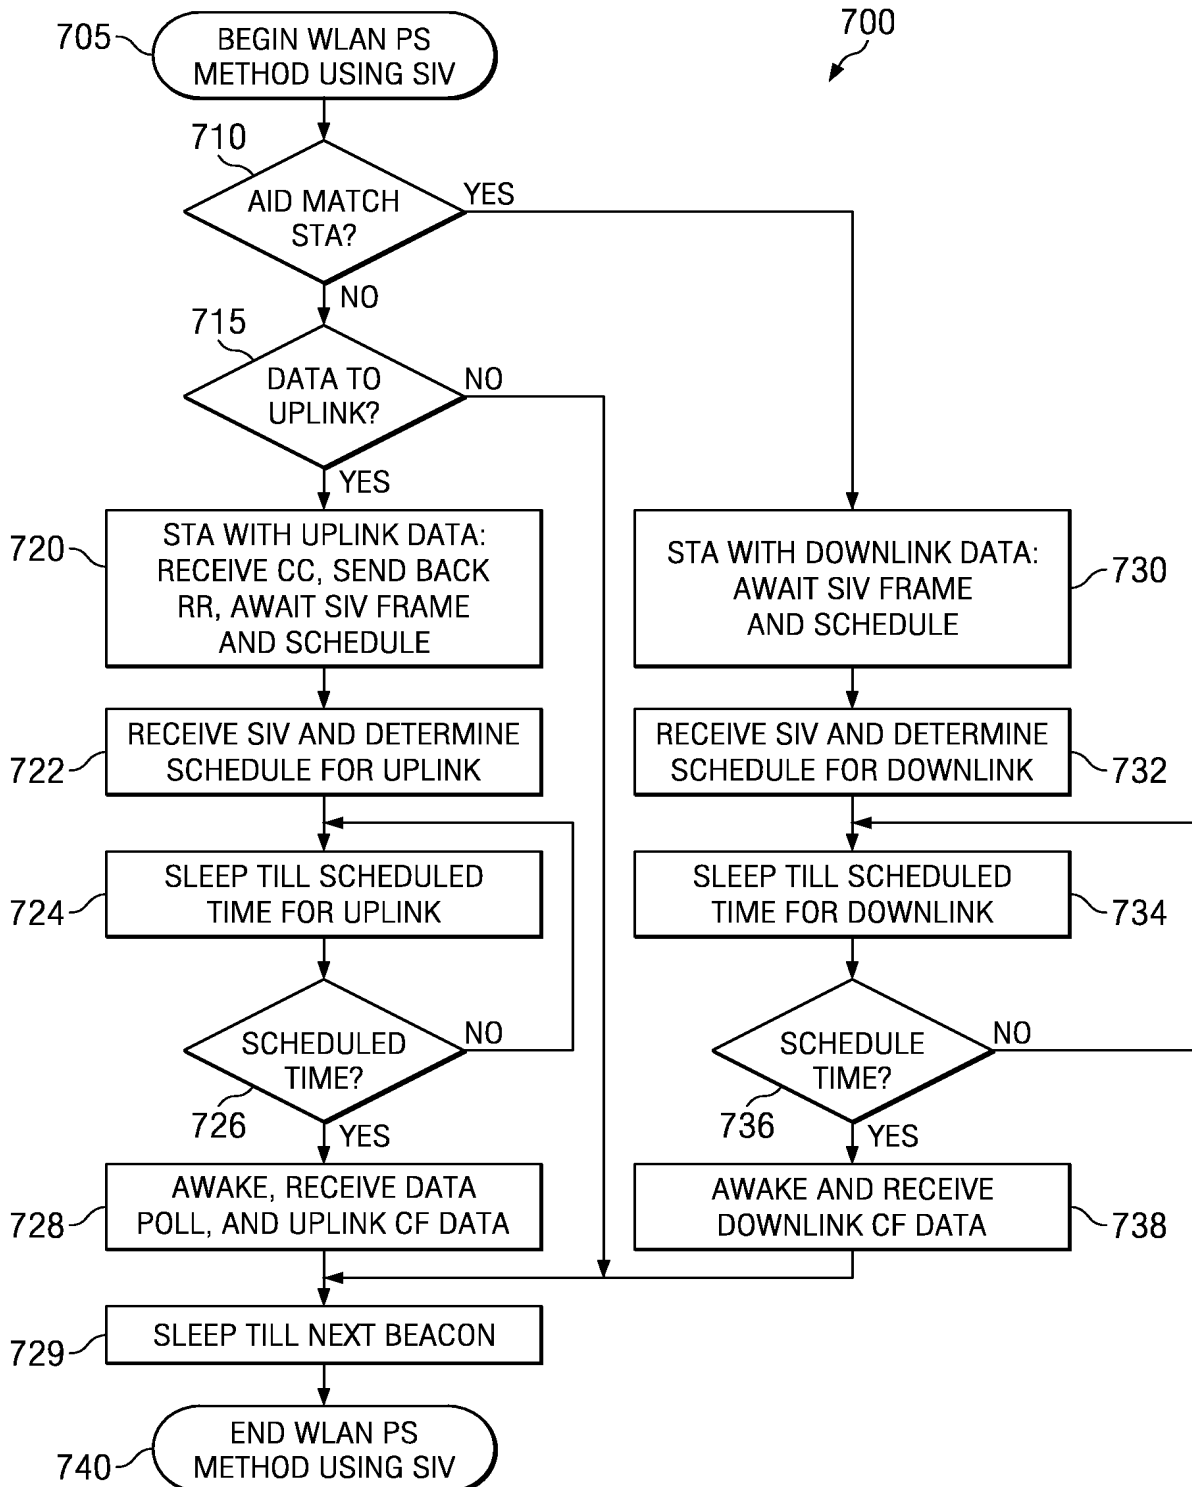

8/12








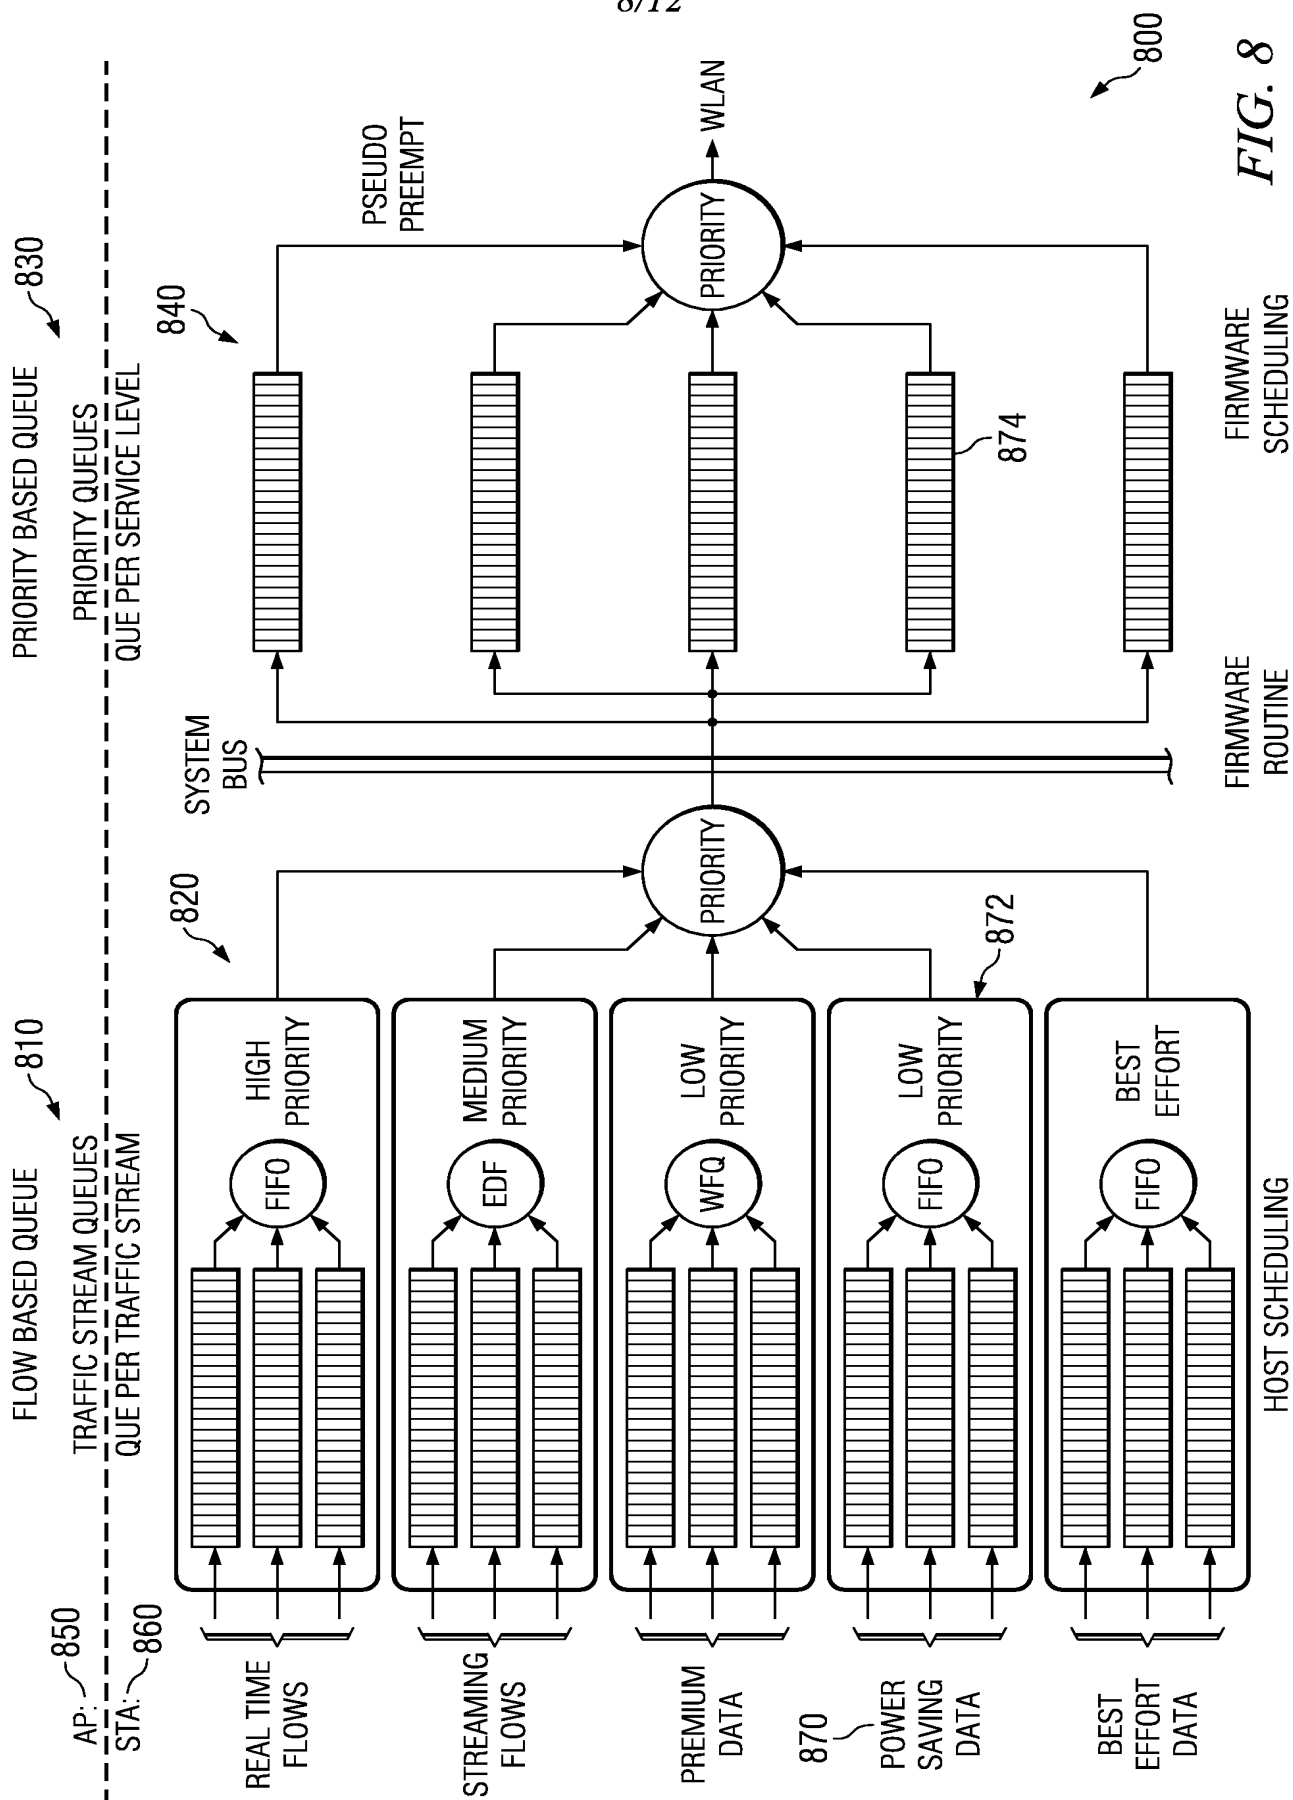


FIG. 8

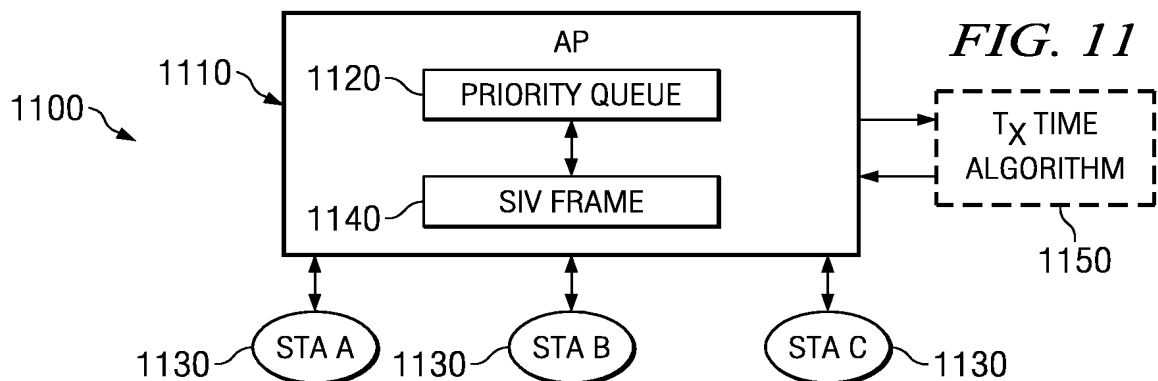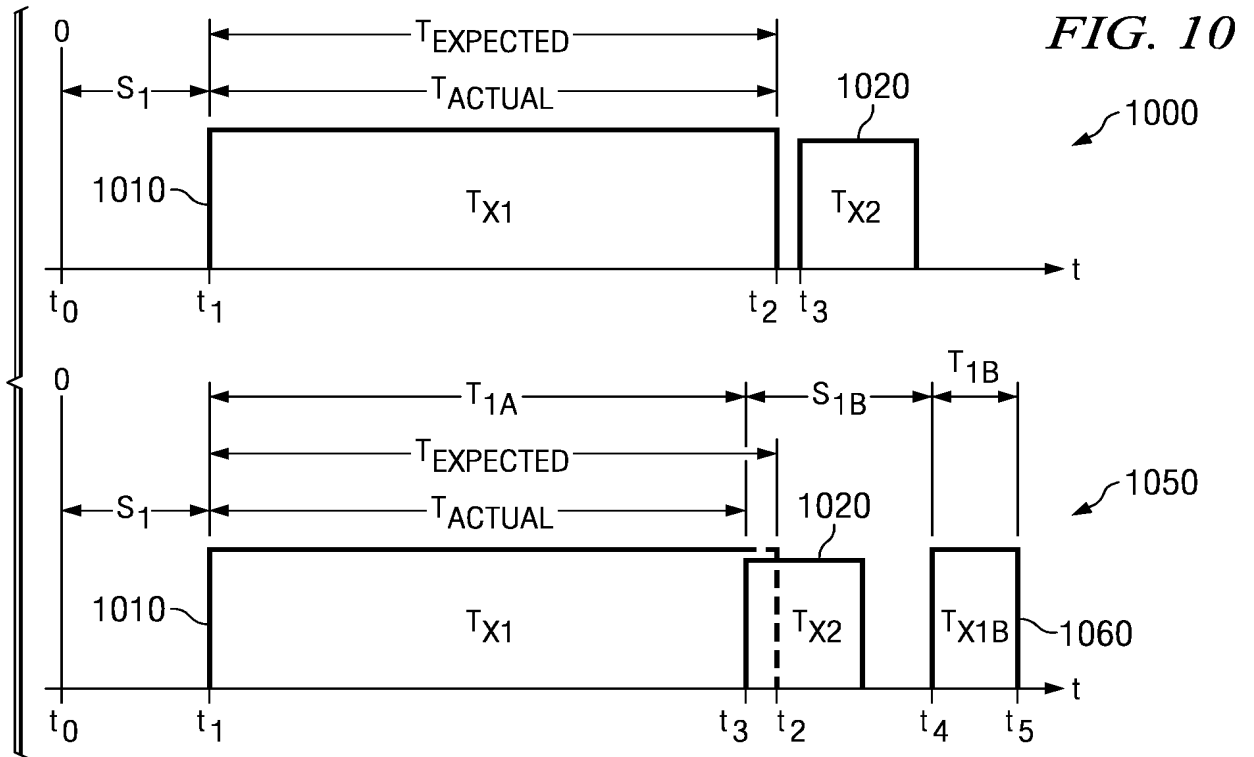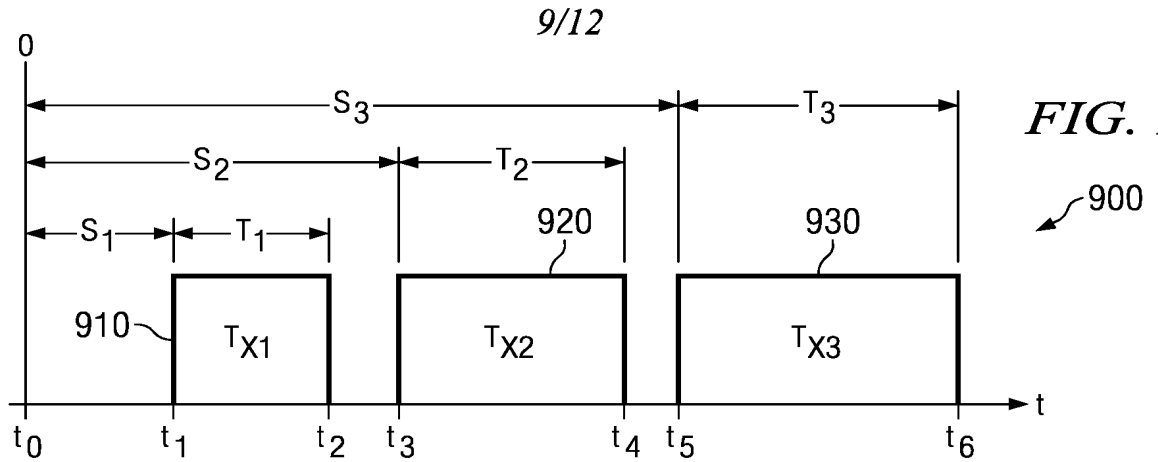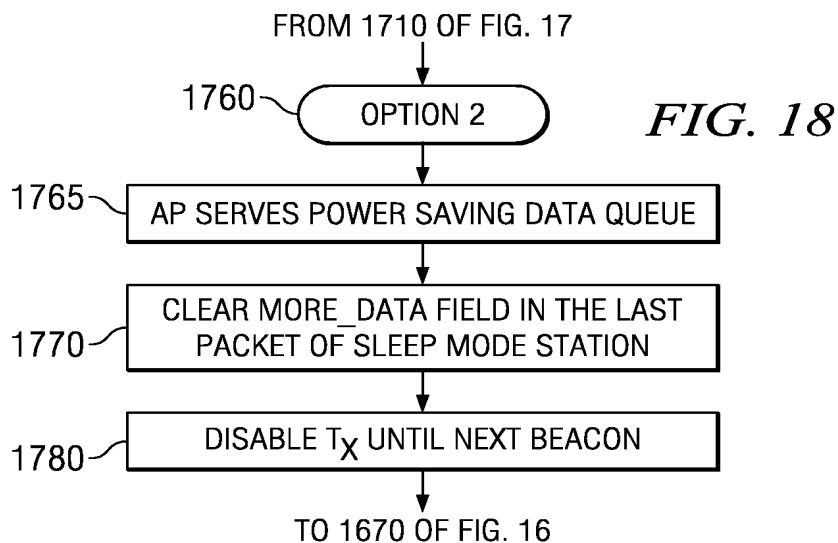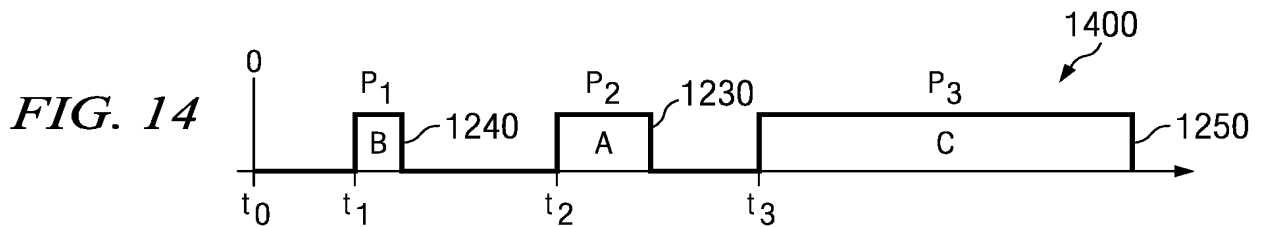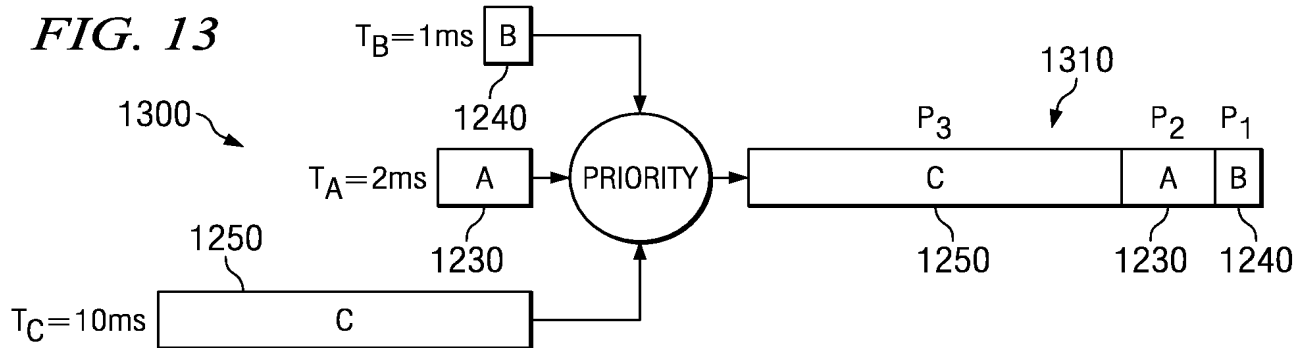

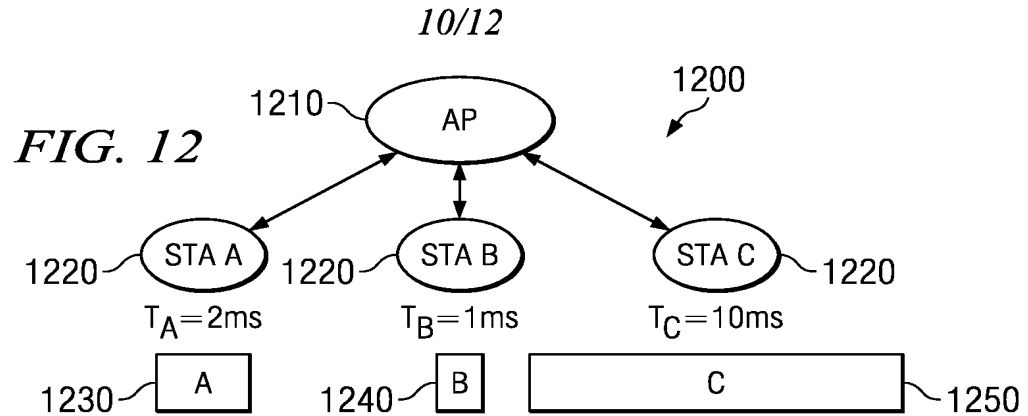

11/12


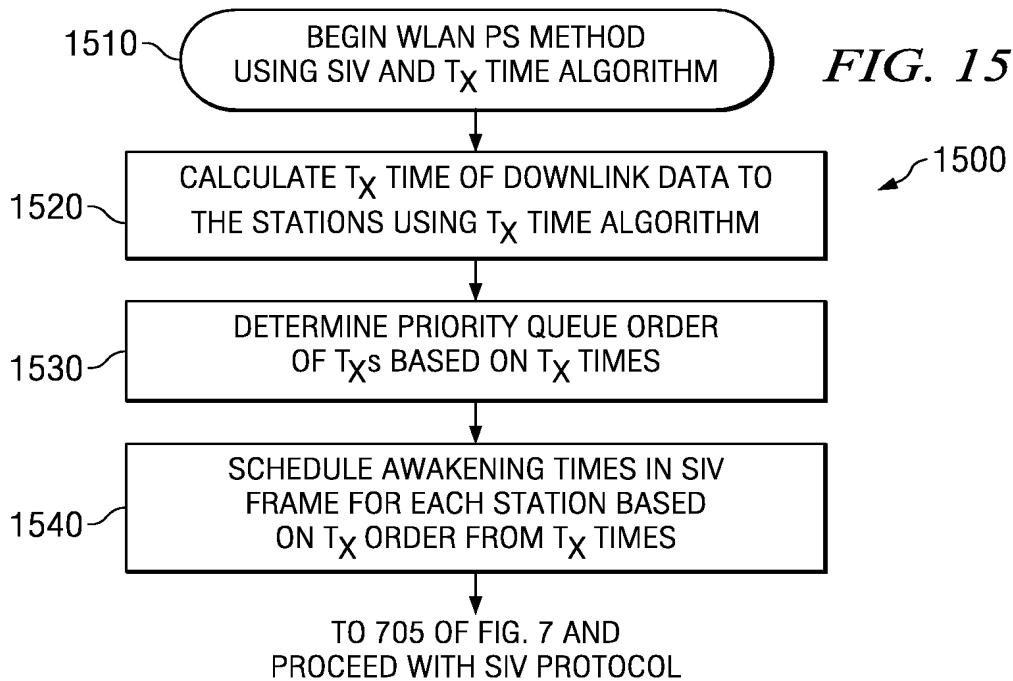


FIG. 16

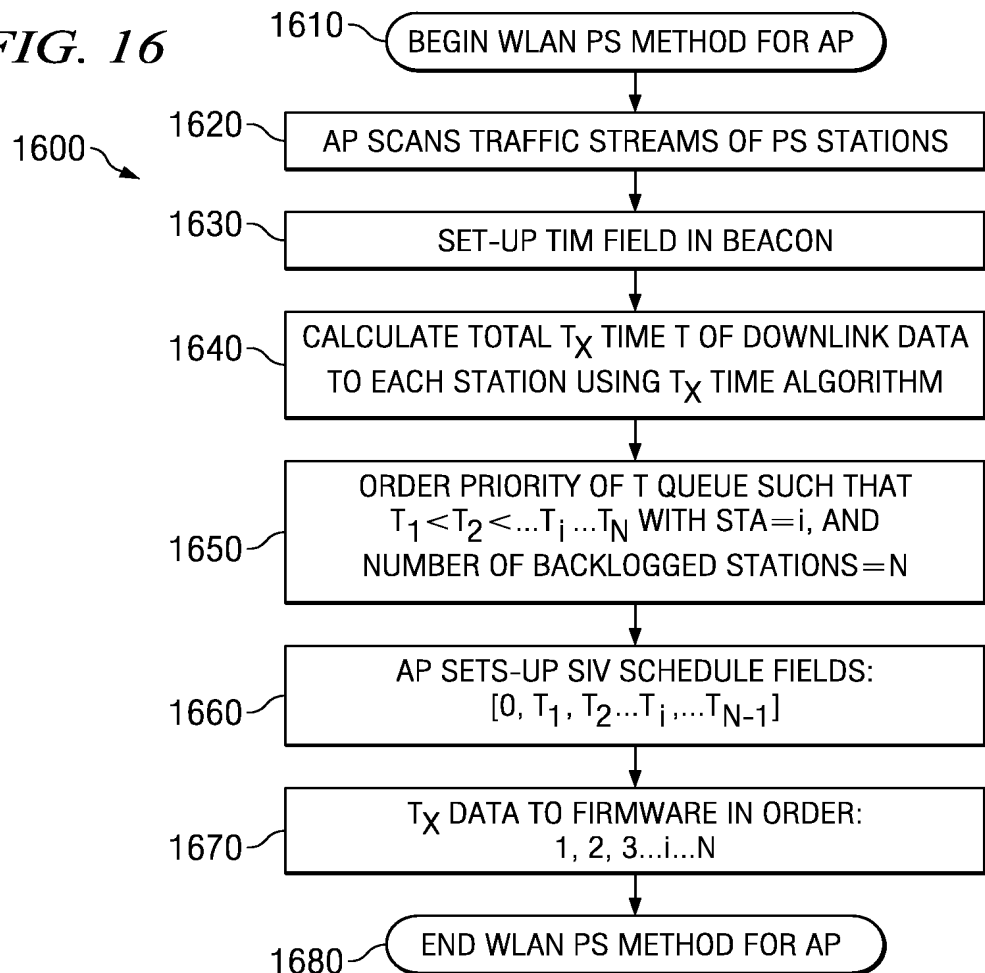

12/12

FIG. 17

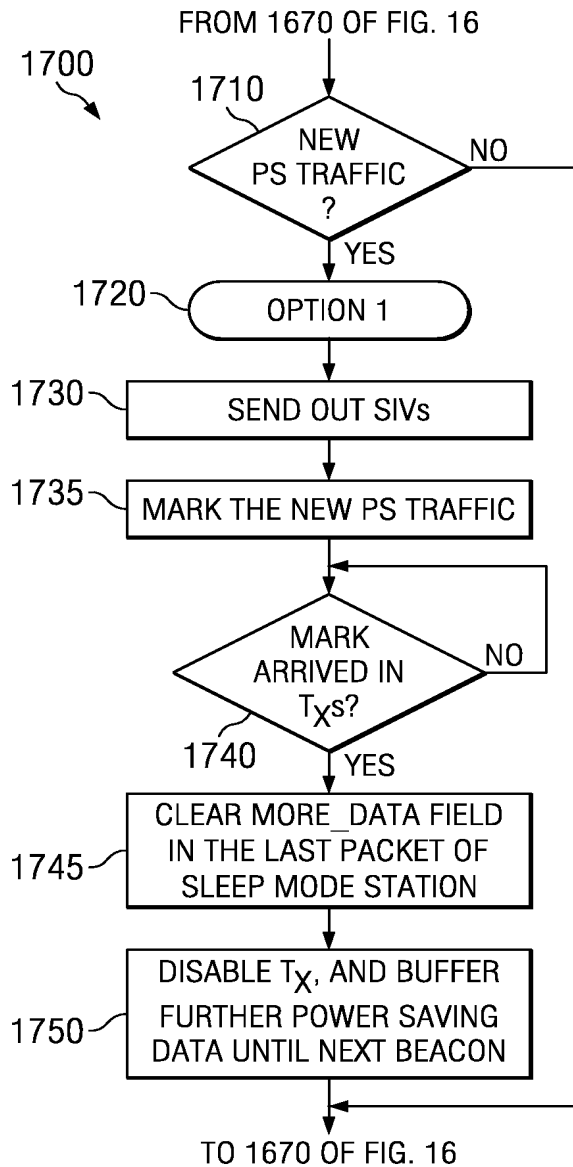


FIG. 19

